Xtreamled
Hoornwerk 1 kmr 3
5264 PL Vught
+31-621532240
www.xtreamled.com
info@xtreamled.com

Fixture:	LooLoo RGB free-occupied module
Type number:	30051.100

Photographs will allways remain property of Xtreamled.
© All rights reserved.

Xtreamled
Hoornwerk 1 kmr 3
5264 PL Vught
+31-621532240
www.xtreamled.com
info@xtreamled.com

Electrical data:

Connection	24 Vdc M8 3-pole connector for Red and Green operation
Power	3,15 W Red; 3,15W Green and 3,15 W Blue (not used)

Optical data:

Amount of LED's	15x Red/Green/Blue
LED type	Cree PLCC6
Color	Red, Green and Blue

Mechanical data:

IP classification	IP51
Minimum ambient temperature	-10°C
Maximum ambient temperature	+40°C
Applied materials	Anodized aluminum housing Opaline Perspex
Mounting	A mounting frame is supplied that is fitted with six magnets. Once the frame has been mounted the LooLoo module, that is also fitted with magnets, can be clicked into place. Other mounting methods can be provided upon request.
Operation	A 24Vdc inductive proximity switch is applied to detect the locking mechanism and can be positioned with the help of a mounting bracket. A control cabinet with a 230 Vac - 24 Vdc LED driver supplies the power to the inductive proximity switches and a relays inside the cabinet. The power capacity of the led driver is determined by the amount of modules applied.
Weight	0,1 kg
Dimensions	25*178*36 mm (length, height width)

Photographs will allways remain property of Xtreamled.
© All rights reserved.

Xtreamled
Hoornwerk 1 kmr 3
5264 PL Vught
+31-621532240
www.xtreamled.com
info@xtreamled.com

Drawing:

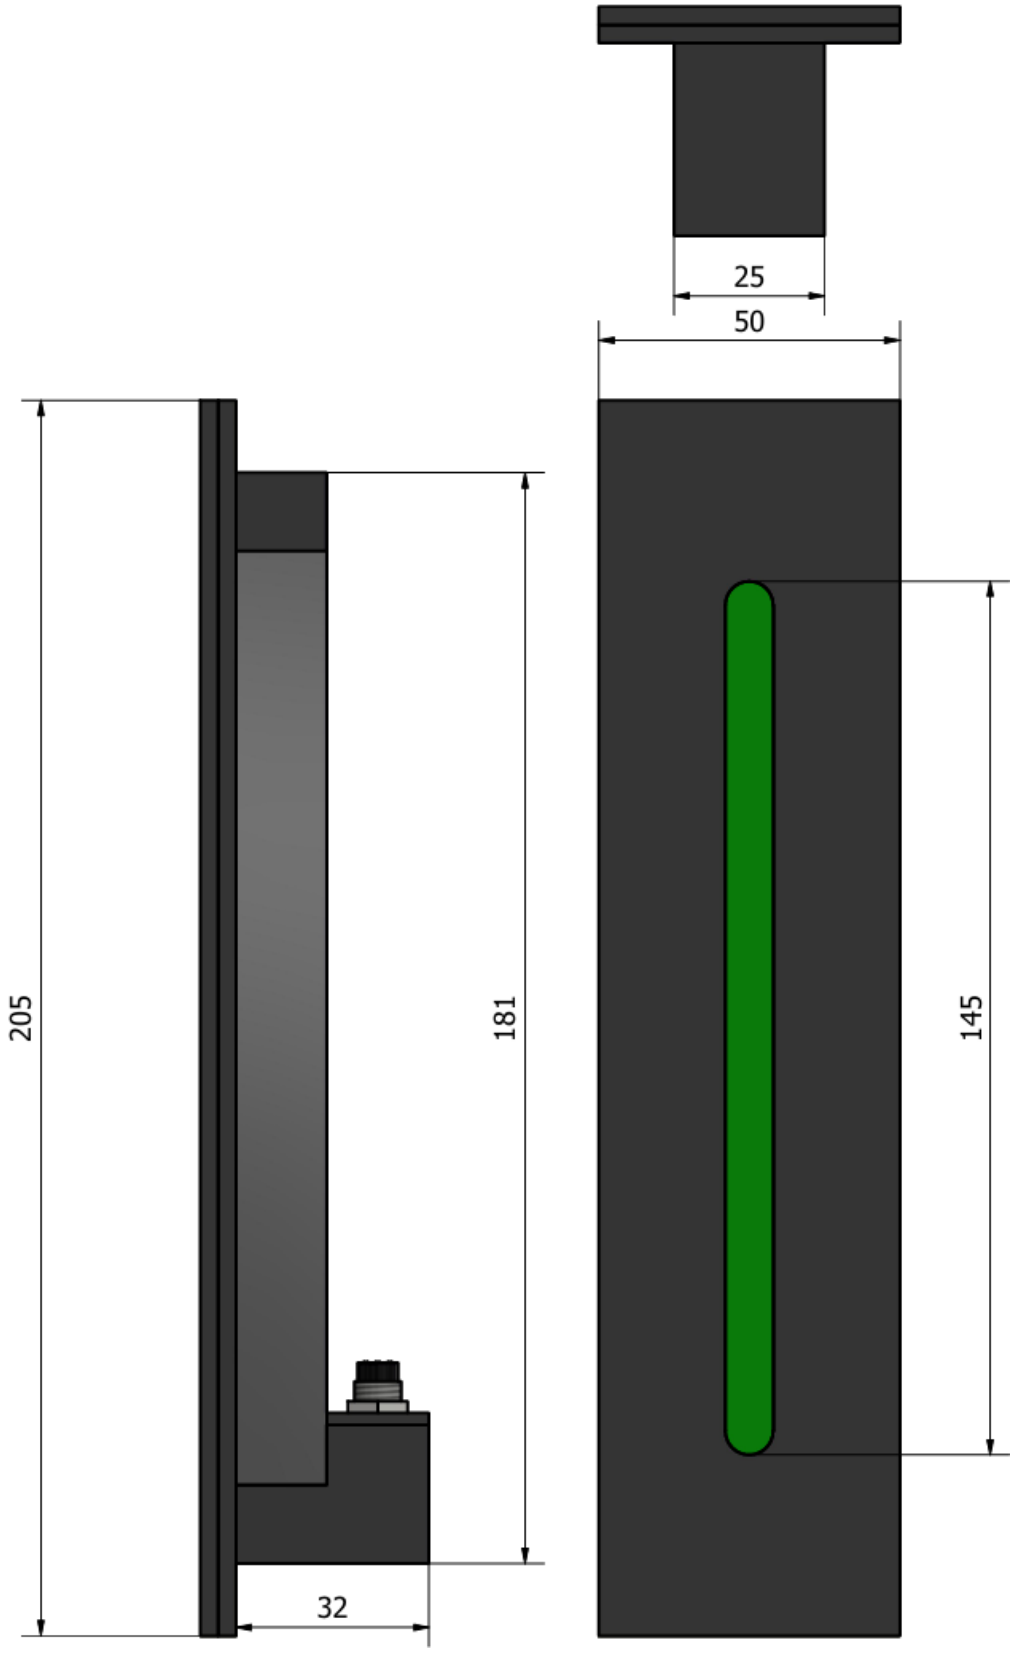

Photographs will allways remain property of Xtreamled.
© All rights reserved.